


# KickFlip 1U

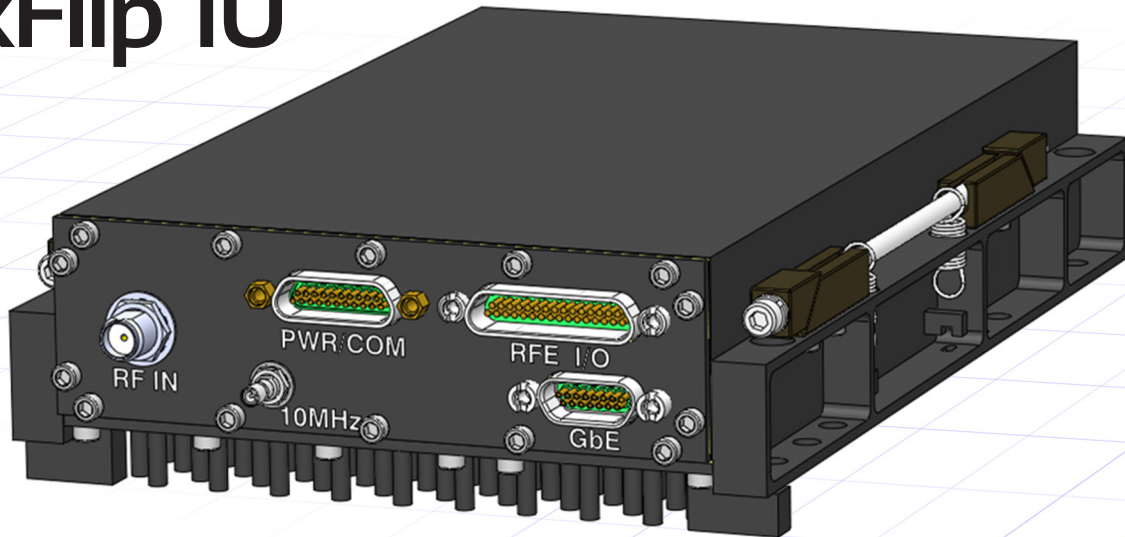

## Low Size, Weight, and Power Payload for Ultra-Wideband Survey, Processing, and Electronic Warfare

KickFlip is a size, weight, and power (SWaP)-optimized ultra-wideband radio with an onboard processing solution. With a frequency range of 600MHz to 44GHz, KickFlip can capture signals from the bottom of cellular bands to the top of almost all existing electronic warfare (EW) needs. Featuring excellent phase noise, high dynamic range, and rapid frequency sweeping, KickFlip is ideally suited to intercept radar and communications from UHF to above Ka band.

KickFlip can automatically detect, record, and process signals without user intervention. Onboard data storage provides over an hour of recording at max bandwidth. The small 1U Mod Payload form factor enables use with Group 1-3 UAS platforms and discreet deployment. Data can be streamed to KickFlip's internal processor, and recordings can be retrieved post-mission.

KickFlip also provides a modular software architecture, allowing applications to be loaded and configured rapidly for a wide range of missions. This allows users to both make use of CACI's extensive collection of survey, processing, and analysis applications, and to bring their own government off-the-shelf (GOTS) or third-party applications.

CACI's powerful, user-friendly mission planner GUI provides detailed mission planning and execution capabilities – allowing the end user to tailor their app selection and execute collaborative missions from a single platform. After the mission, our specialized tools allow for quick triage of recorded data, and either blind or protocol-driven signal analysis.

Overall, KickFlip provides the user with a rugged yet agile SWaP-optimized hardware platform to co-host a high-performance radio with multiple applications and enables missions at the tactical edge.

For more information, contact:

**ISR Products**

[isr-products@caci.com](mailto:isr-products@caci.com)

For more information about our expertise and technology visit:

[www.caci.com](http://www.caci.com)

A *Fortune* World's Most Admired Company

EXPERTISE AND TECHNOLOGY FOR NATIONAL SECURITY

**CACI**  
EVER VIGILANT



## Features

- Single channel.
- Extremely wideband: 600 MHz to 44GHz.
  - 5G sub-6GHz, 28GHz and 39GHz coverage with a single radio.
- Wide range of instantaneous bandwidths.
  - > 200 MHz over VITA-49 possible.
- Sensitive to low-level signals (low noise figure).
- Excellent dynamic range.
- Superior phase noise.
- Fast frequency-sweeping operation.
  - > 40 GHz/second sweep speed.
- Hours of data capture using solid state drives.
- SWaP optimized.
  - 1U modular payload-compliant form factor.
  - Less than 1.5lbs payload weight.
  - Adjustable power draw.
- Standalone operation.
- Advanced mission planning GUI for autonomous operation.
- Signal analysis and mapping features.
- Blind and protocol-driven signal identification.

## Recommended Applications

- CACI's mission planning tools.
- CACI's SNARE multiprotocol COMINT survey tool.
- CACI's ELINT survey tools.
- GOTS or third-party applications via docker or x86 virtual machines.

## Signal Analysis Suite: Spectrum, Waterfall, and Map Views

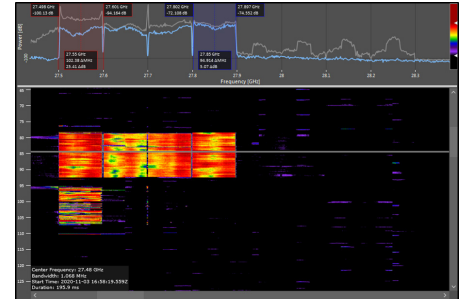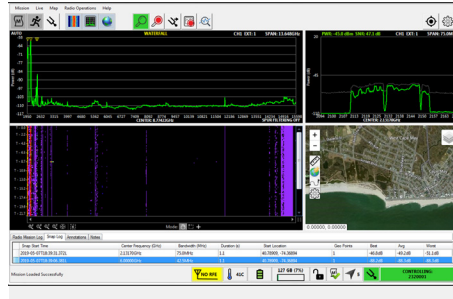

## About KickFlip

KickFlip's high-performance general-purpose processor and software defined radio produce capability faster and help users adapt to modern threats more effectively. Its containerized software architecture enables rapid switching between mission software bundles.

As a component of a broader ecosystem, KickFlip acts as a force multiplier to better prosecute complex, multidomain communication networks. Each KickFlip payload can function independently or be networked together with other systems to tip and cue and aggregate results in a common operating picture.

## KickFlip Specifications

### General Specifications

Frequency Range (Receive)	600 MHz to 44 GHz
Noise Figure	8dB Typ, 11dB max up to 40GHz
Phase Noise (10kHz-40MHz)	< 0.6° RMS, up to 26.5 GHz < 1° RMS, up to 44 GHz
Recording bandwidths	105, 95, 85, 75, 65, 55, 42.5, 37.5, 32.5, 27.5, 21.5 MHz
CPU	Intel 11th generation 4C/8T, up to 4.4GHz
Application Memory	16GB RAM, 64GB SSD
Onboard Recording	2TB SSD (>1 hour @ 105 MHz BW)

### SWaP Specifications

Payload Dimensions	1U MP-compliant (7.25"x4.29"x1.5")
Weight	Less than 1.5lbs
Power	20W to 56W*

### Environmental Specifications

Ingress Protection Rating	IP54
---------------------------	------

Performance varies based on specific application and is adjustable to platform or mission requirements. Preliminary information included; specifications subject to change without notice

This material consists of CACI International Inc general capabilities information that does not contain controlled technical data as defined within the International Traffic in Arms Regulations (ITAR), Part 120.10, or Export Administration Regulations (EAR), Part 734.7-10. (PRR ID748)



EXPERTISE AND TECHNOLOGY  
FOR NATIONAL SECURITY

At CACI International Inc (NYSE: CACI), our 23,000 talented and dynamic employees are ever vigilant in delivering distinctive expertise and technology to meet our customers' greatest challenges in national security and government modernization. We are a company of good character, relentless innovation, and long-standing excellence. Our culture drives our success and earns us recognition as a *Fortune* World's Most Admired Company. CACI is a member of the *Fortune* 1000 Largest Companies, the Russell 1000 Index, and the S&P MidCap 400 Index. For more information, visit us at [caci.com](http://caci.com).

#### Worldwide Headquarters

12021 Sunset Hills Road, Reston, VA 20190  
703-841-7800

#### Visit our website at:

[www.caci.com](http://www.caci.com)

#### Find Career Opportunities at:

<http://careers.caci.com/>

#### Connect with us through social media:

